

产品特性/Features



- 支持速率100G
 - 工作温度范围0~70°C/-40~85°C
 - 满足RoSH-6标准
 - LC 接口
 - 机构支持QSFP应用
- Data rate: 100G
 - Operation temperature: 0~70°C/-40~85°C
 - RoSH-6 compliance
 - LC receptacle
 - Mechanical design suitable for QSFP application



标准产品/Standard Parts

序号 No.	名称 Name	型号 Model	速率 Rate	温度范围 Temperature (°C)	波长(nm) Wavelength	接口 Interface	针脚 Stitching	芯片类型 Chip type
1	100G LR4 BOX TOSA	ATLFL4TM	4*25G	0~70°C/-40~85°C	1295\1300\1305\1310	LC	Hermetic	DFB
2	100G LR4 BOX ROSA	ARLFL4PN	4*25G	0~70°C/-40~85°C	1260nm~1650nm	LC	Hermetic	PIN

尺寸图及脚位图

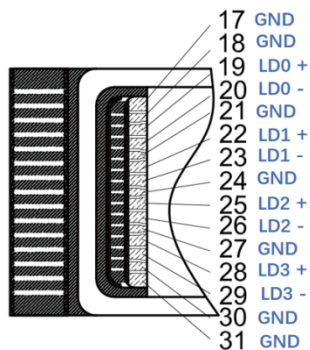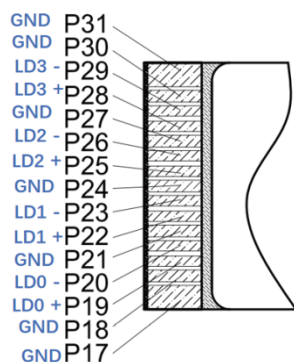

TOSA脚位定义